
# HOT SHOT SGF SERIES

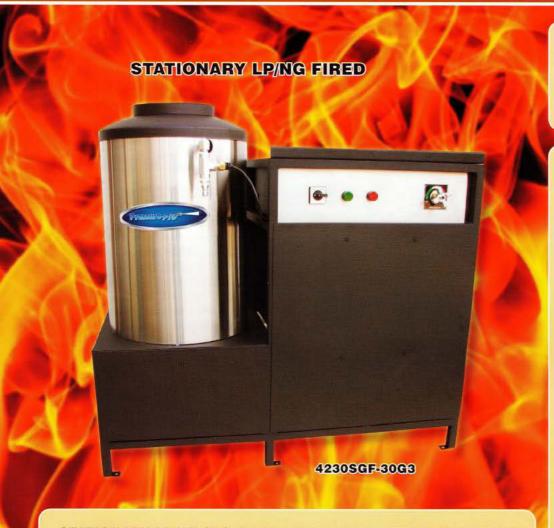

# STATIONARY LP/NG GAS FIRED V-BELT DRIVE ELECTRIC MODELS

4230SGF-20G1	3.8 GPM @ 2000 PSI	6.0 HP	230V/1PH/25A	GP Pump	
4230SGF-20G3	3.8 GPM @ 2000 PSI	5.0 HP	230V/3PH/16A	GP Pump	
4460SGF-20G3	3.8 GPM @ 2000 PSI	5.0 HP	460V/3PH/8A	GP Pump	
4230SGF-30G1	4.0 GPM @ 3000 PSI	7.5 HP	230V/1PH/36A	GP Pump	
4230SGF-30G3	4.0 GPM @ 3000 PSI	7.5 HP	230V/3PH/25A	GP Pump	CALL FOR PRICING 563-299-4887
4460SGF-30G3	4.0 GPM @ 3000 PSI	7.5 HP	460V/3PH/15A	GP Pump	
5230SGF-15G1	5.0 GPM @ 1500 PSI	6.0 HP	230V/1PH/25A	HP Pump	
5230SGF-15G3	5.0 GPM @ 1500 PSI	5.0 HP	230V/3PH/16A	HP Pump	
5460SGF-15G3	5.0 GPM @ 1500 PSI	5.0 HP	460V/3PH/8A	HP Pump	
5230SGF-20G1	5.0 GPM @ 2000 PSI	7.5 HP	230V/1PH/36A	HP Pump	
5230SGF-20G3	5.0 GPM @ 2000 PSI	7.5 HP	230V/3PH/25A	HP Pump	
5460SGF-20G3	5.0 GPM @ 2000 PSI	7.5 HP	460V/3PH/15A	HP Pump	
5230SGF-30G1	5.0 GPM @ 3000 PSI	10.0 HP	230V/1PH/42A	HP Pump	
5230SGF-30G3	5.0 GPM @ 3000 PSI	10.0 HP	230V/3PH/34A	HP Pump	
5460SGF-30G3	5.0 GPM @ 3000 PSI	10.0 HP	460V/3PH/18A	HP Pump	
8230SGF-30G3	8.0 GPM @ 3000 PSI	15.0 HP	230V/3PH/39A	GP Pump	
8460SGF-30G3	8.0 GPM @ 3000 PSI	15.0 HP	460V/3PH/20A	GP Pump	

**CUSTOMER MUST** SPECIFY EITHER LP (LIQUID PROPANE) OR NG (NATURAL GAS) WHEN PLACING ORDER Example: 4230SGF-20G1-LP

#### STANDARD FEATURES

- Rugged powder coated steel frame. enclosed pump/motor compartment w/ hinged lid
- Frame Dimensions: 54"L x 20"W x 44"H All models except 8.0 GPM / 56"L x 22"W x 54"H 8.0 GPM models only
- Super efficient schedule 80 coil
- Stainless steel coil wrapper, control panel, & float tank
- Robert Shaw LP/NG electronic ignition 24 volt controls
- Commercial/Industrial grade motors
- Low speed V-belt driven General pump
- Adjustable Thermostat
- Vacuum switch
- · Safety pressure relief valve
- 10' power cord (no plug)

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate.

### STANDARD ACCESSORIES

- Gun/wand assembly with insulated grip and quick connects
- 50' high pressure hose w/quick connects
- Adjustable high pressure chemical metering system
- 2 color-coded QC spray nozzles

## **AVAILABLE OPTIONS**

98-011 Hour Meter

98-101 10" Draft Diverter

98-102 Soap Solenoid w/ Panel Mount

98-020 Time-delay Shutdown w/

Adjustable Timer 1 Phase

98-104 Time-delay Shutdown w/

Adjustable Timer 3 Phase

98-105 Single Remote Station w/

Start/Stop/Burner

98-106 Primary Remote Stations w/

Start/Stop/Burner: option to add additional stations

98-107 Add'l Remote Stations

98-108 Oil Fired Option

98-130 By-Pass Thermal Shutdown

98-510 18/5 Cable, Single Remote Station 98-512 18/7 Cable, Multi Remote Stations

**All Stainless Steel Models** Available - consult factory